


IMPLEMENTATION CONCEPT

C SEED 201

CISCOD

THE UNFOIDING TV

IMPLEMENTATION CONCEPT C SEED 201 C SEED 201

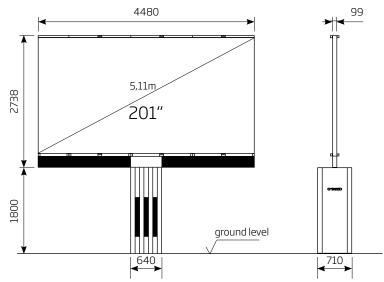

PHYSICAL DIMENSIONS TV

LED TV Size (diagonal)	inch/mm	201/5105	
LED TV Size (Width)	inch/mm	176.4 / 4480	
LED TV Size (Height)	inch/mm	94.5 / 2400	
Standard LED Screen (Depth)	inch/mm	3.9 / 99	
LED TV Area	sq.ft./m²	116 / 10.8	
LED TV weight	ka	1,350	

TV SYSTEM

Brightness	nits	4,000
Pixel Pitch	mm	1.90
Processing Depth	bit	16 per color
Color Spectrum	Colors	64 billion
Refresh Rate	Hz	3,840
Lifespan LED	h	100,000
Contrast Ratio		7,000:1
Color Temperature	K	6,500 - 10,000
Viewing Angle- Horizontal Vertical	degrees	160 160
Operating Temperature Range		°C: -20 to +45 °F -4 to +113
Broadband speaker peak out	W	6 x 250
Broadband speaker frequency range		40 Hz - 22 kHz
Subwoofer peak out	W	1 x 700
Subwoofer frequency range		20 Hz - 200 Hz

INPUT | OUTPUT

Video Input	HDMI2.0/DP1.4
Serial In/Output	2 x USB
Audio Output	pre-amp, 9.2, independent sub
Network Connection	1 x RJ45

OPERATION

Power Supply LED Screen	Standard	3 x 400V+N+PE/32A/50-60Hz
	High-Leg-Delta	3 x 240V+PE/60A/50-60Hz*
	Single-Phase/Split-Phase	240V/120V+PE/110A/50-60Hz**
Input Power max typical	W/m²	880 230
Power Consumption max typical	kW	19 5.7

SPECIFIC FEATURES

Automatic TV Cover | 9.2 AV-Receiver | Remote Control | 4K LED HDR10+ Controller TV-Rotation Angle: 135° left & 135° right | TV System Height Adjustable within 1250mm | Available in Black Matt Metallic or Greyaluminium Metallic or other colors on request


^{*} transfomer required | ** phase converter and transformer required




IMPLEMENTATION CONCEPT C SEED 201 LOCATION



IMPLEMENTATION CONCEPT C SEED 201 TV SHAFT

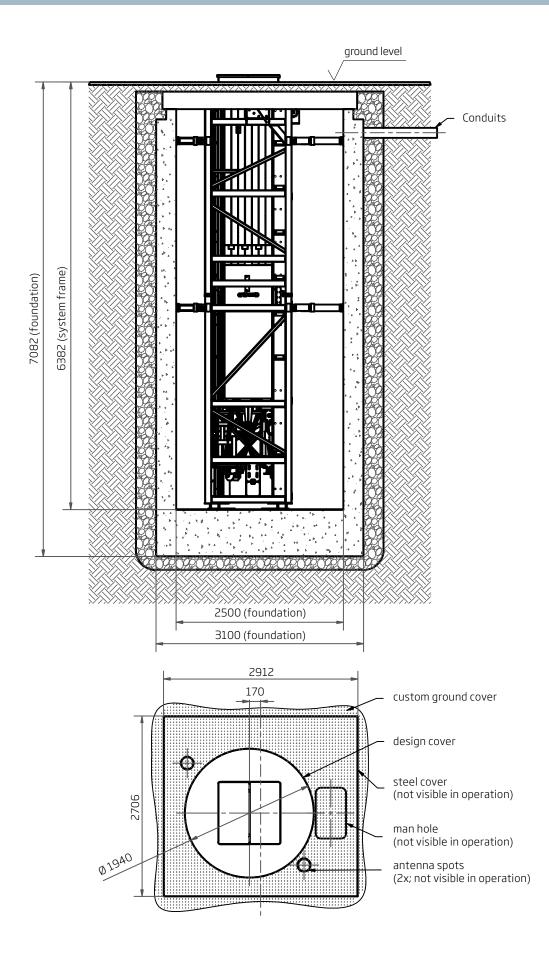

IMPLEMENTATION CONCEPT C SEED 201 TV SHAFT

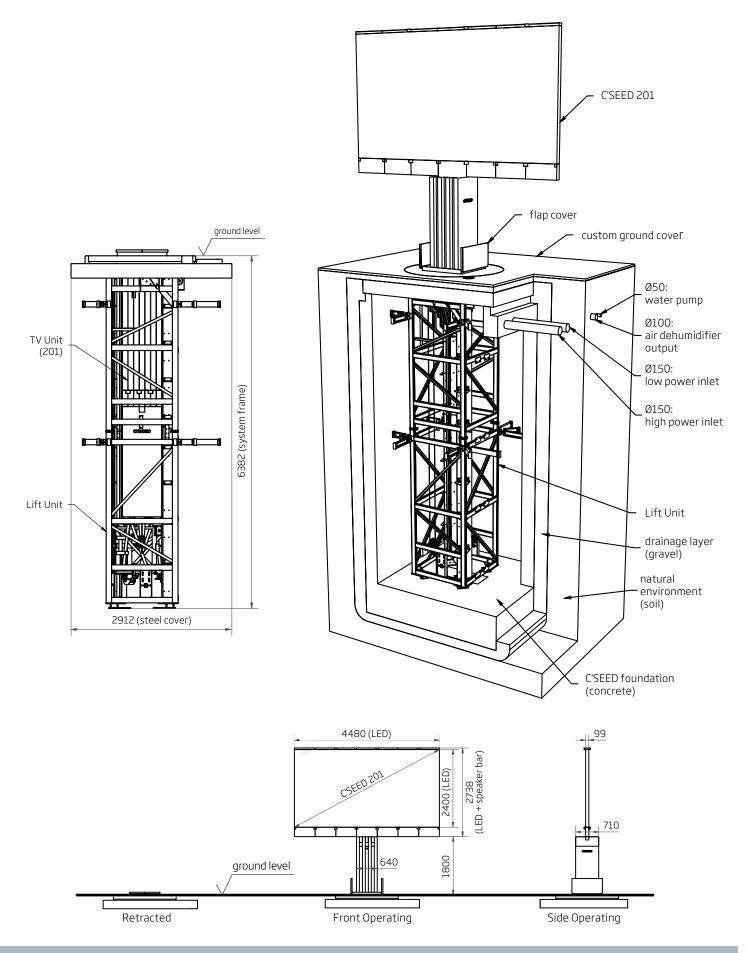

TV SHAFT

- ca. 2500x2500x6382 mm I 99x99x252 inches I LxWxD
 - according to final TV shaft plan
- Earthing of the TV well (min. 3 times)
- Drainage Natural drainage directly from the sump pit

EQUIPMENT CLOSE TO THE TV

- Emergency Stop Button
- Confirmation Panel
- HMI Touch panel for wired system control
- Weather Station Location near the TV
- Dehumidifier device (provided by owner of the venue)

TECHNICAL ROOM

max. 100m I 320 feet to TV system

*/**Transformer I **Phase Converter (provided by owner of the venue)

- Requested Output: 3x400V+N+PE | 32A | 50-60Hz AC (3~)
- */**Transformer: TEMCo Euro-Plus Transformer TT1003 15 kVA https://temcoindustrial.com/temco-euro-plus-trade-transformer-tt1003-15-kva/
- **Phase Converter: 10HP 240V Digital Phase Converter Phase Perfect® https://www.phaseperfect.com/original/240-volt/pt010/

UPS I uninterrupted power supply

- 3x400V+N+PE
- 320x700x840 mm l 12.6x27.6x33.1 inches l WxHxD
- Ventilation on backside (300 mm l 12 inches free space must be reserved)
- High power transformer needed (provided by owner of the venue)

Control Cabinet

- 800x1100x300 mm I 32x44x12 inches I WxHxD
- Feed cable with 5 pins or 4 pins plus additional earthing
- Connector on left side (200mm | 8 inches free space must be reserved)
- Power protection with a "fault-current circuit breaker AC/DC sensitive and electric frequency converter capable"


AV-Rack


- AV-Rack with 32RU 600x1600x800 mm I 23.7x63x31.5 inches I WxHxD
- SAT I Video I TV signals to be connected via HDMI inputs
- Internet connection as of beginning of installation (permanent!)

CABLING DUCTS AND CONDUITS

- 2 tubes with diameter 150 mm I 6 inches (not less)
 - Located between electricity cabinet and TV-System (low & high power connection)
- 1 Tube with diameter 100 mm I 6 inches (not less)
 - Located between AV rack and TV-System (data cables from MMS)
- 1 Tube with diameter 40mm I 1 ½ inches (not less)
 - Located between weather station and control cabinet (weather station data)
- 1 Tube with diameter 40 mm | 1½ inches (not less)
 - Located between Control Cabinet and Confirmation Panel
- 1 Tube with diameter 40 mm l 1½ inches (not less)
 - Located between Control Cabinet and Antenna
- 1 Tube with diameter 40 mm l 1½ inches (not less)
 - Only if Control Cabinet and AV-Rack are not in same room



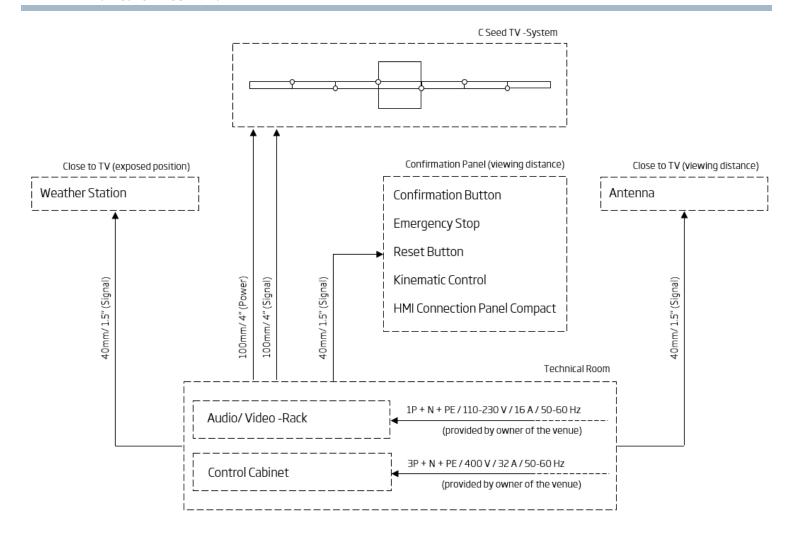

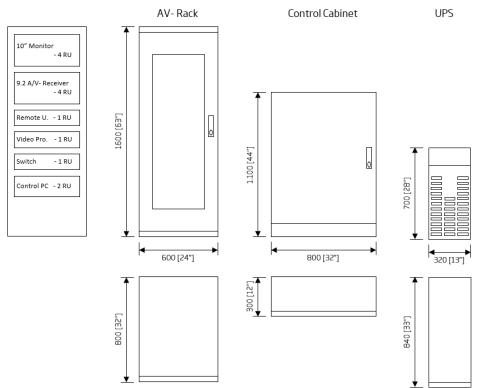

SERVICES PROVIDED BY AND AT THE EXPENSES OF THE OWNER OF THE VENUE

Power Supply: Standard 3 x 400V+N+PE/32A/50-60Hz
High-Leg-Delta 3 x 240V+PE/60A/50-60Hz*
Single-Phase/Split-Phase 240V/120V+PE/110A/50-60Hz**

- Internet connection at the AV Rack as of beginning of the installation
- WIFI I WLAN at the venue as of beginning of the installation
- Access for heavy duty excavator, crane and trucks to TV well
- Excavation for the construction of the TV concrete basin according to ground-structure
- Waterproof construction of the TV shaft according to C SEED plans
- Cabling ducts & conduits for TV system according C SEED electrical conduits plan (project specific)
- Cables and cable installation according to C SEED electrical cable plan (project specific)
- Dehumidifier device, sump pump, conduits & cabling for it and connections to power supply and drainage
- Sat I video I TV signals at the AV-Rack
- Crane on site approximately 20 hours in total (min. 4.5 tons & 10 meters of height)
- Connecting Power Supply by local electrician
- Electrical test protocol according to international standards of all cables must be provided to C SEED prior installation

SERVICES PROVIDED BY C SEED

- Site visit meeting with construction company, civil engineer etc.
- Standard plan for construction of the TV well for local civil engineer
- Project related engineering package
- Coordination with local electrician
- Coordination with local sat I video I TV professional
- Implementation, programming & testing of the C SEED TV
- TCP/IP control protocol for home automation
- Operation training for technical staff of the venue
- Handover & Acceptance Protocol

Contacts	
Owner representative	
Construction company of the venue	
C SEED Project manager	

Vers.: 5.2/HP/25.07.23

^{*} transfomer required | ** phase converter and transformer required

[&]quot;The information and specification contained in the implementation concept are information purpose only and are subject to change without prior notice"