


Unitech Systems designs customized solutions, addressing the specific needs of each application. PLCV7 projector ceiling lift, is designed as a customized product to provide solutions in cases where SERVICE & PROJECTION position separation is required.

Keeping the high standards in utility, quality and stability, this new line incorporates 2 or 3 sets of articulated scissor elements, providing stability in motion and safety in usage. The articulated scissors are equipped with cable holding points, in order to facilitate the cable routing and their secure motion with the lift.

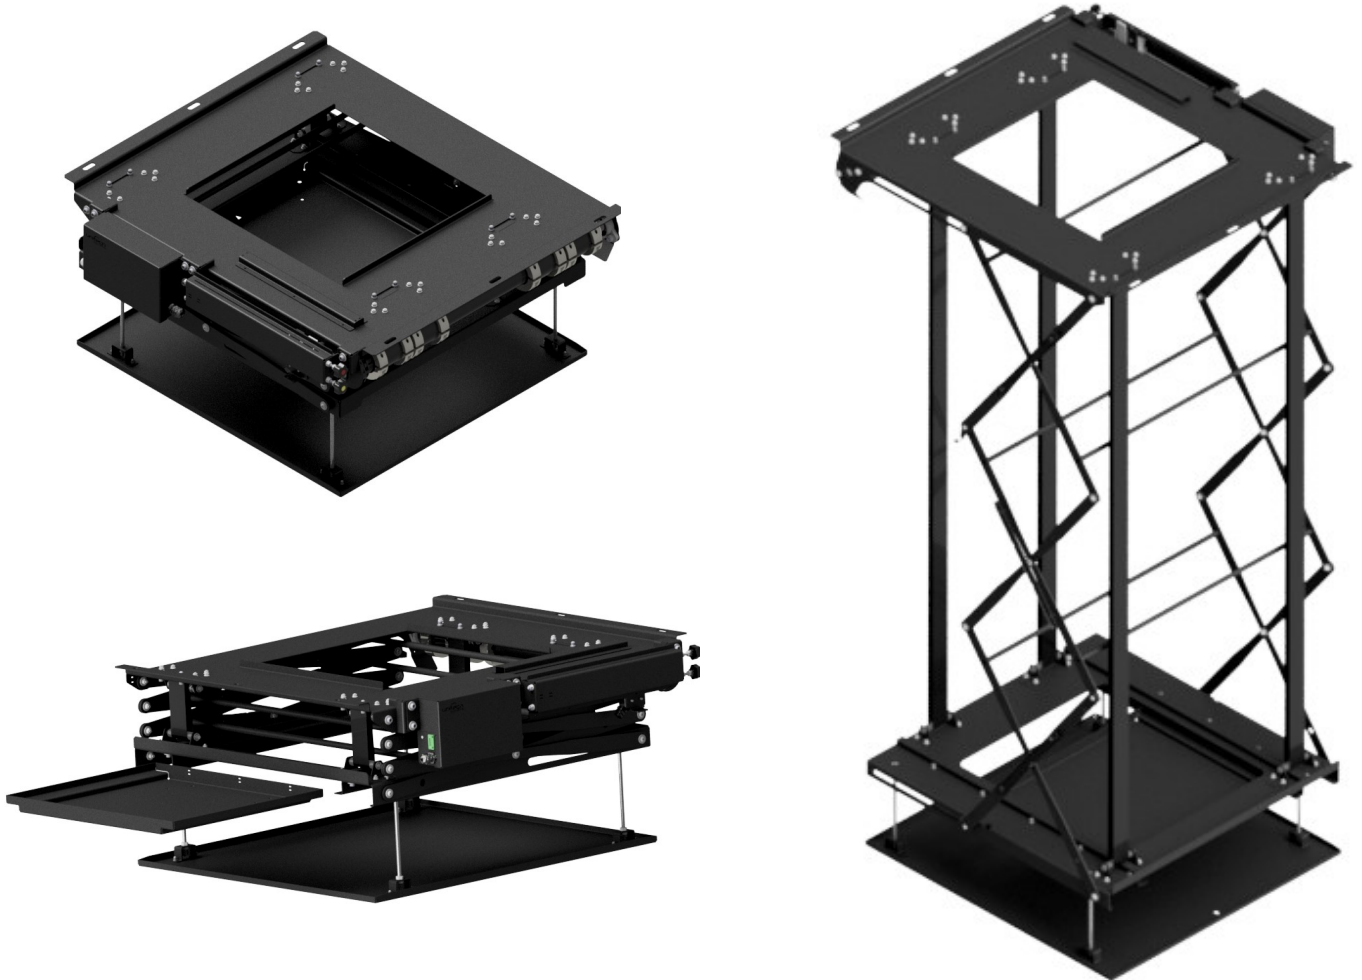

Custom Model	PLCV7.1-1500
Space inside carriage for projector (WxL)	615x750mm
Maximum load capacity (projector+ceiling cover)	<50kg (projector+ceiling cover)
Lift dimensions (WxDxH)	835mm x 895mm x 230mm+projector height (not including ceiling cover pitch)
Net vertical drop down length for PROJECTION position	adjustable, over at least 500mm
Net vertical drop down length for SERVICE position	fixed at 1500mm
Standard color of metallic parts	powder coating in RAL 9005 black or RAL 9016 white
Power supply	230VAC-50/60Hz
Standard control option	dry contacts control box
Optional controls	RF remote control, RS 232 or 485 ports